

3G & 4G

Personal GPS Alarm Tracker

Caresafe Alarm

Easy Guide Instructions

Step 1

Activate and add credit (\$15 or more) the pre paid SIM card that we provided in the package. (Use the activation instructions on the SIM card blister pack)

Step 2


Insert the activated SIM card first in a mobile phone. (Check that the SIM card is already activated to the network)

Step 3

Program the SIM card to maximum number of rings before the network voicemail takes over the call. To do that, dial and call ****61*+61101**30#** with the mobile that the activated SIM card is installed.

Step 4

Remove the activated SIM card from your phone and insert in to the personal alarm, please watch video available on the website.

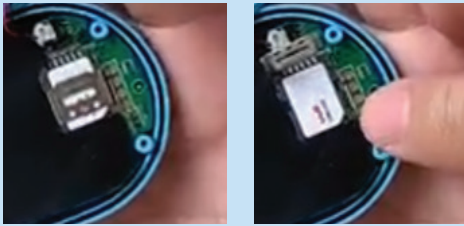

Note!

The SIM card needs to be with the golden contacts down and the cut angle corner of the SIM card needs to be against the angle shaped corner of the SIM card socket.

Step 5

Program the Personal Alarm to suit your needs but to do that, first you need to program the Administrator mobile number which will be the only one can program all the features.

Use the mobile which is the administrator to send a text to the Personal Alarm the administrator mobile number as number 1

Example: N1,1234567890

Now you can continue to program the additional up to 4 contact numbers for the SOS function: N2,...N3,...N4,...N5....

You can program additional phone number which is for the top side button which is for contacting direct without pushing the SOS, for example could be 000.

The rest of programming, please use the instruction manual available on the website.

<https://caresafealarm.com.au/technical-documents/>

