




Report No.:SZ13100035S03



SAR TEST REPORT

Issued to

cellsafe & panasales PTY LTD

For

Radi case

Model Name : CS-IP05C
 Trade Name : cellsafe
 Brand Name : cellsafe
 Standard : EN 50360: 2001
 EN 62209-1: 2006
 Test date : 2013-10-10
 Issue date : 2013-10-21



Shenzhen MORLAB Communication Technology Co., Ltd.

Tested by Zou Jian

Zou Jian

Date 2013.10.21

Approved by Zeng Dexin

Zeng Dexin

Date 2013.10.21

Review by Zhu Zhan

Zhu Zhan

Date 2013.10.21



LAB CODE 20081223-00

IEEE 1725

OTA



電訊管理局



BQTF



Reg. No.

695796

The report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen MORLAB Communication Technology Co., Ltd. It may not be reproduced either in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the Shenzhen MORLAB Telecommunication Co., Ltd to his GPRSer, Supplier or others persons directly concerned. Shenzhen MORLAB Telecommunication Co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. In the event of the improper use of the report, Shenzhen MORLAB Telecommunication Co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

DIRECTORY

1. TESTING LABORATORY	4
1.1. Identification of the Responsible Testing Location	4
1.2. Accreditation Certificate	4
1.3. List of Test Equipments	4
2. TECHNICAL INFORMATION	5
2.1. Identification of Applicant	5
2.2. Identification of Manufacturer	5
2.3. Equipment Under Test (EUT).....	5
2.3.1. Photographs of the EUT	5
2.4. Applied Reference Documents	5
2.5. Test Environment/Conditions	6
3. SPECIFIC ABSORPTION RATE (SAR)	7
3.1. Introduction	7
3.2. SAR Definition.....	7
4. SAR MEASUREMENT SETUP	8
4.1. The Measurement System	8
4.2. Probe	8
4.3. Phantom	10
4.4. Device Holder	10
5. TISSUE SIMULATING LIQUIDS	11
6. UNCERTAINTY ASSESSMENT	12
6.1. UNCERTAINTY EVALUATION FOR HANDSET SAR TEST	12
6.2. UNCERTAINTY FOR SYSTEM PERFORMANCE CHECK	13
7. SAR MEASUREMENT EVALUATION	15
7.1. System Setup.....	15
7.2. Validation Results.....	15
8. OPERATIONAL CONDITIONS DURING TEST	16
8.1. Information on the testing.....	16
8.2. Measurement procedure.....	16
8.3. Description of interpolation/extrapolation scheme	17
9. TEST RESULTS LIST	18

ANNEX A PHOTOGRAPHS OF THE EUT	19
ANNEX B GRAPH TEST RESULTS	22

Change History		
Issue	Date	Reason for change
1.0	Oct.14, 2013	First edition
2.0	Oct.21, 2013	Second edition

1. Testing Laboratory

1.1. Identification of the Responsible Testing Location

Name: Shenzhen Morlab Communications Technology Co., Ltd.
Morlab Laboratory

Address: 3/F, Electronic Testing Building, Shahe Road, Nanshan District, Shenzhen, 518055 P. R. China

1.2. Accreditation Certificate

Accredited Testing Laboratory: No. CNAS L3572

1.3. List of Test Equipments

No.	Instrument	Type	Cal. Date	Cal. Due
1	PC	Dell (Pentium IV 2.4GHz, SN:X10-23533)	(n.a)	(n.a)
2	Network Emulator	Rohde&Schwarz (CMU200, SN:105894)	2013-9-26	1year
3	Voltmeter	Keithley (2000, SN:1000572)	2013-9-24	1year
4	Synthetizer	Rohde&Schwarz (SML_03, SN:101868)	2013-9-24	1year
5	Amplifier	Nucl udes (ALB216, SN:10800)	2013-9-24	1year
6	Power Meter	Rohde&Schwarz (NRVD, SN:101066)	2013-9-24	1year
7	Probe	Satimo (SN:SN_3708_EP80)	2013-9-24	1year
8	Phantom	Satimo (SN:SN_36_08_SAM62)	2013-9-24	1year
9	Liquid	Satimo (Last Calibration:2011-12-13)	NA	NA
10	Dipole 1800MHz	Satimo (SN 36/08 DIPF 101)	2013-9-23	1year

2. Technical Information

Note: the following data is based on the information by the applicant.

2.1. Identification of Applicant

Company Name: cellsafe & panasales PTY LTD
Address: N/A

2.2. Identification of Manufacturer

Company Name: Shenzhen xinjida technology co.,ltd
Address: weiyecheng industrial xintian village guanlan town baoan shenzhen china

2.3. Equipment Under Test (EUT)

Model Name: CS-IP05C
Trade Name: cellsafe
Brand Name: cellsafe

2.3.1. Photographs of the EUT

Please see for photographs of the EUT.

2.4. Applied Reference Documents

Leading reference documents for testing:

No.	Identity	Document Title
1	EN 50360: 2001	Product standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from GSM Mobile phones.
2	EN 62209-1: 2006	Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)

2.5. Test Environment/Conditions

Normal Temperature (NT):	20 ... 25 °C
Relative Humidity:	30 ... 75 %
Air Pressure:	980 ... 1020 hPa
Test frequency:	LTE Band 3 (1800MHz) WCDMA Band 1 (2100MHz)
Operation mode:	Call established
Power Level:	LTE Band 3 Max output power WCDMA Band 1 Max output power

During SAR test, EUT is in Traffic Mode (Channel Allocated) at Normal Voltage Condition. A communication link is set up with a System Simulator (SS) by air link, and a call is established.

The Absolute Radio Frequency Channel Number (ARFCN) is allocated to 1870, 1890 and 1910 respectively in the case of LTE Band3, or to 9612, 9750 and 9888 respectively in the case of WCDMA Band1. The EUT is commanded to operate at maximum transmitting power.

The EUT shall use its internal transmitter. The antenna(s), battery and accessories shall be those specified by the manufacturer. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. If a wireless link is used, the antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the handset.

The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the handset by at least 35 dB.

3. Specific Absorption Rate (SAR)

3.1. Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

3.2. SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = C \frac{\delta T}{\delta t}$$

, where C is the specific heat capacity, δT is the temperature rise and δt the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

, where σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the rms electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

4. SAR Measurement Setup

4.1. The Measurement System

Comosar is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The Comosar system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 10g mass.

4.2. Probe


For the measurements the Specific Dosimetric E-Field Probe SN 37/08 EP80 with following specifications is used

- Dynamic range: 0.01-100 W/kg
- Tip Diameter : 6.5 mm
- Distance between probe tip and sensor center: 2.5mm
- Distance between sensor center and the inner phantom surface: 4 mm
(repeatability better than +/- 1mm)

- Probe linearity: <0.25 dB
- Axial Isotropy: <0.25 dB
- Spherical Isotropy: <0.25 dB
- Calibration range: 835to 2500MHz for head & body simulating liquid.

Angle between probe axis (evaluation axis) and surface normal line: less than 30°

Probe calibration is realized, in compliance with CENELEC EN 62209 and IEEE 1528 std, with CALISAR, Antenna proprietary calibration system. The calibration is performed with the EN 622091 annexe technique using reference guide at the five frequencies.

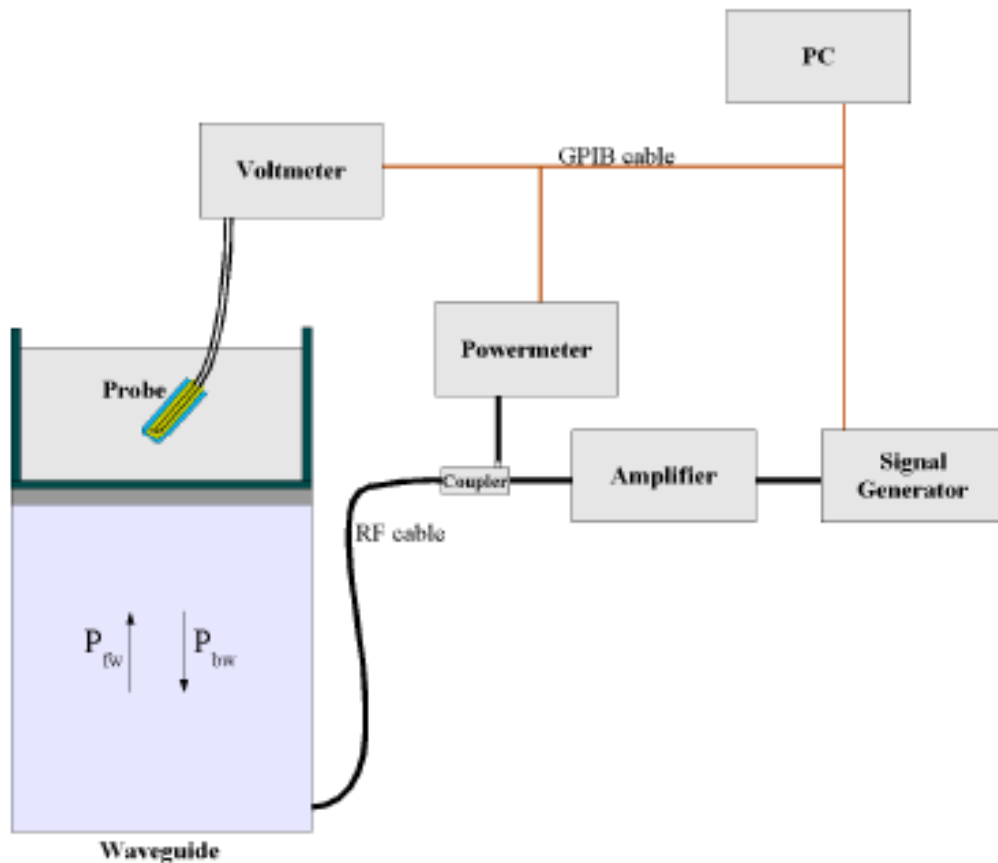

$$SAR = \frac{4(P_{fw} - P_{bw})}{ab\delta} \cos^2\left(\pi \frac{y}{a}\right) e^{-2z/\delta}$$

Where :

P_{fw} = Forward Power

P_{bw} = Backward Power

a and b = Waveguide dimensions

δ = Skin depth

Keithley configuration:

Rate = Medium; Filter =ON; RDGS=10; FILTER TYPE =MOVING AVERAGE; RANGE AUTO

After each calibration, a SAR measurement is performed on a validation dipole and compared with a NPL calibrated probe, to verify it.

The calibration factors, $CF(N)$, for the 3 sensors corresponding to dipole 1, dipole 2 and dipole 3 are:

$$CF(N) = SAR(N) / V_{lin}(N) \quad (N=1,2,3)$$

The linearised output voltage $V_{lin}(N)$ is obtained from the displayed output voltage $V(N)$ using

$$V_{lin}(N) = V(N) * (1 + V(N) / DCP(N)) \quad (N=1,2,3)$$


where DCP is the diode compression point in mV.

4.3. Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

4.4. Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1°.

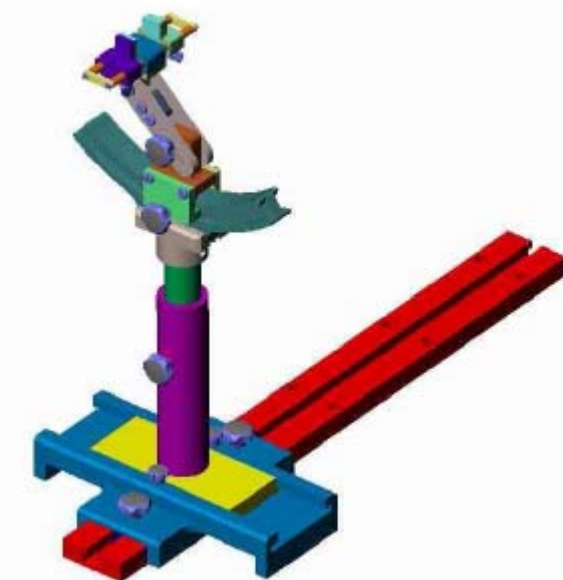

Device holder

System Material	Permittivity	Loss Tangent
Delrin	3.7	0.005

5. Tissue Simulating Liquids

Simulating liquid used for testing at frequencies of 1800MHz, which are mainly made of sugar, salt and water. Approximately 20litres are needed for an upright head compared to about 25 liter for a horizontal bath phantom. The liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is (head SAR)or from the flat phantom to the liquid top surface (body SAR) is 15cm.

Following are the recipes for one liter of head tissue simulating liquid for frequency band 1800 MHz.

Ingredients (% by weight)	Frequency Band
	1800MHz
Tissue Type	Head
Water	55.36
Salt(NaCl)	0.35
Sugar	30.45
HEC	0.0
Bactericide	0.0
Triton	0.0
DGBE	13.84
Acticide SPX	0.0
Dielectric Constant	41.00
Conductivity (S/m)	1.38

Recipes for Tissue Simulating Liquid

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an Agilent 85033E Dielectric Probe Kit and an Agilent Network Analyzer.

Table 1: Dielectric Performance of Head Tissue Simulating Liquid

Temperature: 23.0~23.8°C, humidity: 54~60%.			
/	Frequency	Permittivity ϵ	Conductivity σ (S/m)
Target value	1800 MHZ	40	1.38
Validation value (Oct.10)	1800 MHZ	38.509998	1.4023913

6. Uncertainty Assessment

The following table includes the uncertainty table of the IEEE 1528. The values are determined by Antennessa.

6.1. UNCERTAINTY EVALUATION FOR HANDSET SAR TEST

a	b	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/e	k
Uncertainty Component	Sec.	Tol (+- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	V i
Measurement System									
Probe calibration	E.2.1	7.0	N	1	1	1	7.00	7.00	
Axial Isotropy	E.2.2	2.5	R	$\sqrt{3}$	0.7	0.7	1.01	1.01	
Hemispherical Isotropy	E.2.2	4.0	R	$\sqrt{3}$	0.7	0.7	1.62	1.62	
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	
Linearity	E.2.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	
System detection limits	E.2.5	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	
Readout Electronics	E.2.6	0.02	N	1	1	1	0.02	0.02	
Reponse Time	E.2.7	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	
Integration Time	E.2.8	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	
RF ambient Conditions	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	
Probe positioner Mechanical Tolerance	E.6.2	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	
Probe positioning with respect to Phantom Shell	E.6.3	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	E.5.2	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	
Test sample Related									
Test sample positioning	E.4.2.1	0.03	N	1	1	1	0.03	0.03	N - 1
Device Holder Uncertainty	E.4.1.1	5.00	N	1	1	1	5.00	5.00	
Output power Power drift - SAR drift measurement	6.6.2	2.74	R	$\sqrt{3}$	1	1	1.58	1.58	
Phantom and Tissue Parameters									
Phantom Uncertainty (Shape and thickness tolerances)	E.3.1	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	
Liquid conductivity - deviation from target value	E.3.2	4.57	R	$\sqrt{3}$	0.64	0.43	1.69	1.13	

Liquid conductivity - measurement uncertainty	E.3.3	5.00	N	1	0.64	0.43	3.20	2.15	M
Liquid permittivity - deviation from target value	E.3.2	3.69	R	$\sqrt{3}$	0.6	0.49	1.28	1.04	
Liquid permittivity - measurement uncertainty	E.3.3	10.00	N	1	0.6	0.49	6.00	4.90	M
Combined Standard Uncertainty			RSS				12.52	11.71	
Expanded Uncertainty (95% Confidence interval)			k				25.05	23.42	

6.2. UNCERTAINTY FOR SYSTEM PERFORMANCE CHECK

a	b	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/e	k
Uncertainty Component	Sec.	Tol (+- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	V i
Measurement System									
Probe calibration	E.2.1	7.0	N	1	1	1	7.00	7.00	
Axial Isotropy	E.2.2	2.5	R	$\sqrt{3}$	0.7	0.7	1.01	1.01	
Hemispherical Isotropy	E.2.2	4.0	R	$\sqrt{3}$	0.7	0.7	1.62	1.62	
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	
Linearity	E.2.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	
System detection limits	E.2.5	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	
Readout Electronics	E.2.6	0.02	N	1	1	1	0.02	0.02	
Reponse Time	E.2.7	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	
Integration Time	E.2.8	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	
RF ambient Conditions	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	
Probe positioner Mechanical Tolerance	E.6.2	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	
Probe positioning with respect to Phantom Shell	E.6.3	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	E.5.2	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	
Dipole									
Dipole axis to liquid Distance	8,E.4.2	1.00	N	$\sqrt{3}$	1	1	0.58	0.58	N - 1
Input power and SAR drift measurement	8,6.6.2	2.74	R	$\sqrt{3}$	1	1	1.58	1.58	

Phantom and Tissue Parameters									
Phantom Uncertainty (Shape and thickness tolerances)	E.3.1	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	
Liquid conductivity - deviation from target value	E.3.2	4.57	R	$\sqrt{3}$	0.64	0.43	1.69	1.13	
Liquid conductivity - measurement uncertainty	E.3.3	5.00	N	1	0.64	0.43	3.20	2.15	M
Liquid permittivity - deviation from target value	E.3.2	3.69	R	$\sqrt{3}$	0.6	0.49	1.28	1.04	
Liquid permittivity - measurement uncertainty	E.3.3	10.00	N	1	0.6	0.49	6.00	4.90	M
Combined Standard Uncertainty			RSS				11.50	10.61	
Expanded Uncertainty (95% Confidence interval)			k				23.00	21.21	

7. SAR Measurement Evaluation

7.1. System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom.

Equipments :

name	Type and specification
Signal generator	E4433B
Directional coupler	450MHz-3GHz
Amplifier	3W 502(10-2500MHz)
Reference dipole	1800MHz:SN 36/08 DIPF 101

7.2. Validation Results

Comparing to the original SAR value provided by SATIMO, the validation data should be within its specification of 10 %.

Frequency	1800MHz
Target value (10g)	19.8 W/Kg
250 mW input power	4.823 W/Kg
Test value (10g)	19.292 W/Kg


Note: System checks the specific test data please see page 31-23.

8. Operational Conditions During Test

8.1. Information on the testing

The mobile phone antenna and battery are those specified by the manufacturer. The battery is fully charged before each measurement. The output power and frequency are controlled using a base station simulator. The mobile phone is set to transmit at its highest output peak power level.

The mobile phone is test in the “cheek” and “tilted” positions on the left and right sides of the phantom. The mobile phone is placed with the vertical centre line of the body of the mobile phone and the horizontal line crossing the centre of the earpiece in a plane parallel to the sagittal plane of the phantom.

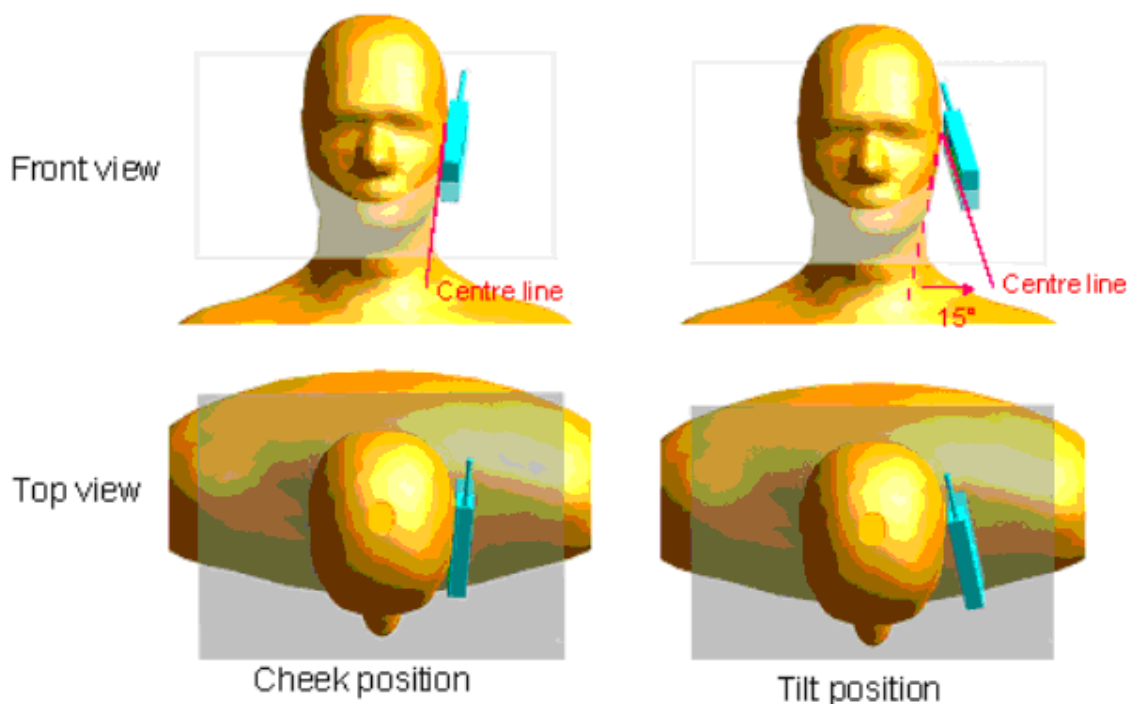

Description of the “cheek” position:

The mobile phone is well placed in the reference plane and the earpiece is in contact with the ear. Then the mobile phone is moved until any point on the front side get in contact with the cheek of the phantom or until contact with the ear is lost.

Description of the “tilted” position:

The mobile phone is well placed in the “cheek” position as described above. Then the mobile phone is moved outward away from the month by an angle of 15 degrees or until contact with the ear lost.

Remark: Please refer to Appendix B for the test setup photos.

8.2. Measurement procedure

The following steps are used for each test position

- Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors can not directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

8.3. Description of interpolation/extrapolation scheme

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimize measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is used to determine this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10 grams and 1 gram requires a very fine resolution in the three dimensional scanned data array.

9. Test Results List

LTE Band 3(1800MHz)

Temperature: 21.0~23.8°C, humidity: 54~60%.				
Phantom Configurations	Device Test Positions	Accessory to be tested with iphone5c	Channel	SAR(W/Kg)
				10g
Right Side Of Head	Cheek/Touch	N/A	1890	0.536
	Cheek/Touch	CS-IP05C	1890	0.071

WCDMA Band 1(2100MHz)

Temperature: 21.0~23.8°C, humidity: 54~60%.				
Phantom Configurations	Device Test Positions	Accessory to be tested with iphone5c	Channel	SAR(W/Kg)
				10g
Right Side Of Head	Cheek/Touch	N/A	9750	0.500
	Cheek/Touch	CS-IP05C	9750	0.035

Annex A Photographs of the EUT

1. EUT Right Head Touch/Cheek Position



2. EUT Right Head Touch/Cheek Position



3. ETU view



Liquid Level Photo



Annex B Graph Test Results

BAND	<u>PARAMETERS</u>
<u>LTE Band 3</u>	<u>Measurement 1:</u> Right Head with Cheek device position on Middle Channel in LTE mode (iphone5c test alone) <u>Measurement 2:</u> Right Head with Cheek device position on Middle Channel in LTE mode (iphone5c test with CS-IP05C case)
<u>WCDMA Band 1</u>	<u>Measurement 3:</u> Right Head with Cheek device position on Middle Channel in WCDMA mode (cellphone alone) <u>Measurement 4:</u> Right Head with Cheek device position on Middle Channel in WCDMA mode (iphone5c test with CS-IP05C case)

MEASUREMENT 1

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.10.10

Measurement duration: 7 minutes 59 seconds


A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	LTE BAND 3
Channels	Middle
Signal	QPSK_20MHz_50RB

B. SAR Measurement Results

Middle Band SAR (Channel 19575):

Frequency (MHz)	1747.500000
Relative permittivity (real part)	41.269851
Conductivity (S/m)	1.420357
Power drift (%)	-0.430000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.3°C
ConvF:	42.533, 36.791, 41.019
Crest factor:	1:1

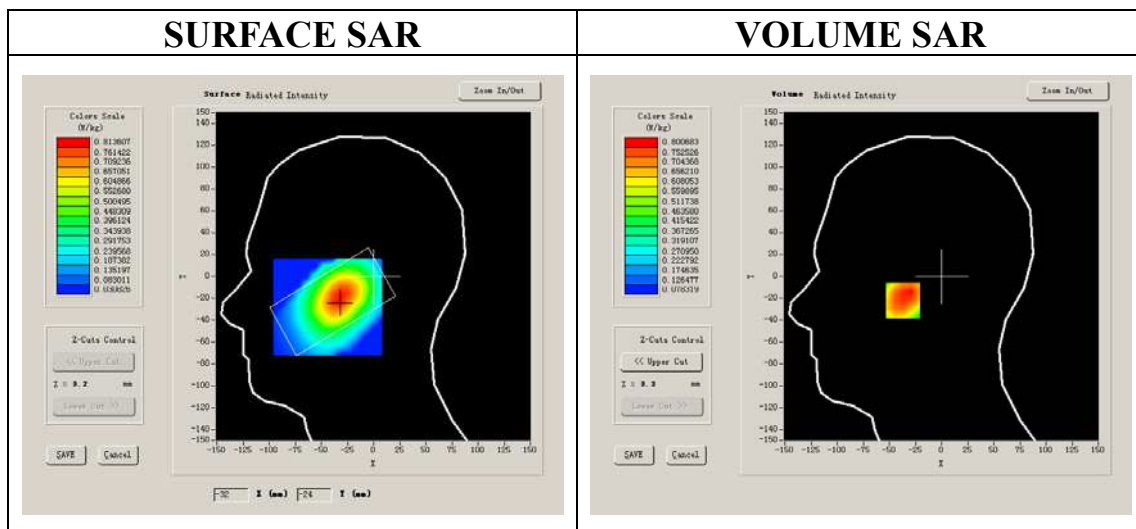


Maximum location: X=-33.00, Y=-22.00

SAR 10g (W/Kg)	0.535709
SAR 1g (W/Kg)	0.768571


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.7724	0.6077	0.4408	0.3304	0.2351	0.1734


SAR, Z Axis Scan (X = -33, Y = -22)

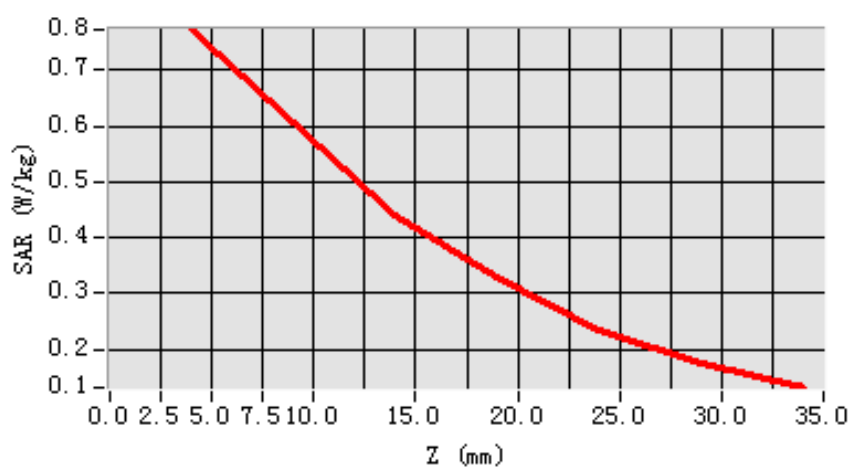

3D scen shot

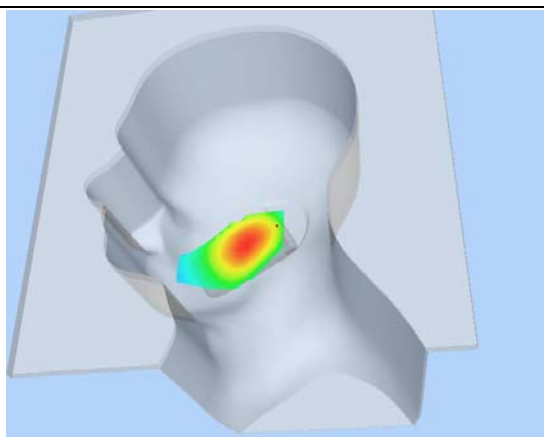

Hot spot position

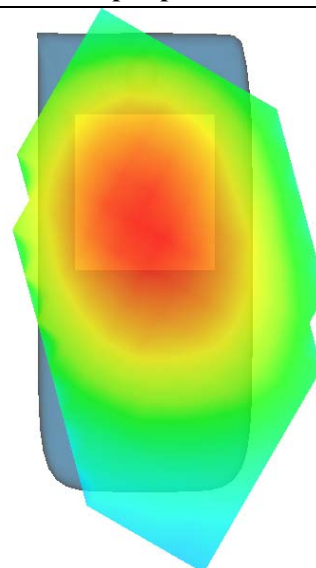

MEASUREMENT 2

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.10.10

Measurement duration: 7 minutes 41 seconds


A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	LTE BAND 3
Channels	Middle
Signal	QPSK_20MHz_50RB

B. SAR Measurement Results

Middle Band SAR (Channel 19575):

Frequency (MHz)	1747.500000
Relative permittivity (real part)	41.269851
Conductivity (S/m)	1.420357
Power drift (%)	-0.620000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.3°C
ConvF:	42.533, 36.791, 41.019
Crest factor:	1:1

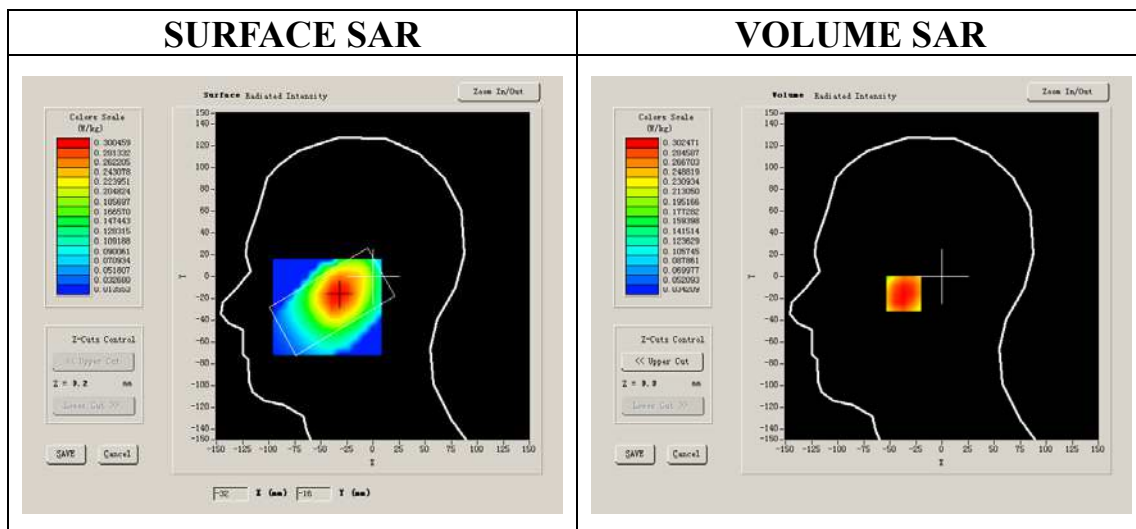


Maximum location: X=-74.00, Y=-66.00

SAR 10g (W/Kg)	0.070591
SAR 1g (W/Kg)	0.131663


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1348	0.0641	0.0305	0.0141	0.0076	0.0034


SAR, Z Axis Scan (X = -74, Y = -66)

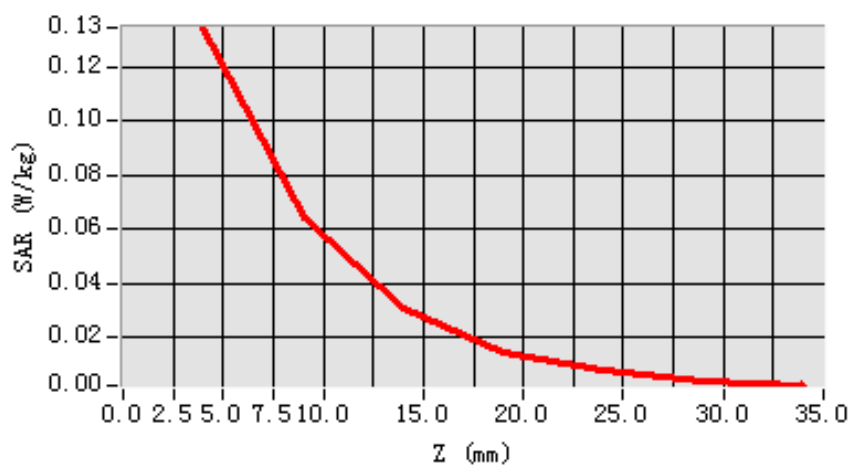

3D scen shot

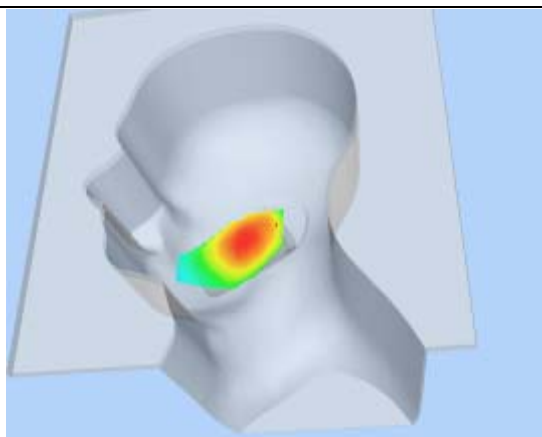

Hot spot position

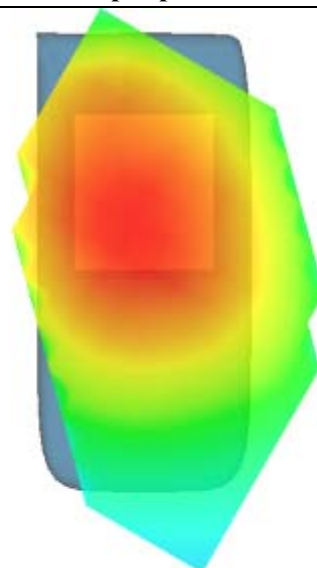

MEASUREMENT 3

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.10.10

Measurement duration: 8 minutes 51 seconds


A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	WCDMA2100
Channels	Middle
Signal	CDMA

B. SAR Measurement Results

Middle Band SAR (Channel 9750):

Frequency (MHz)	1950.000000
Relative permittivity (real part)	39.513290
Conductivity (S/m)	1.386672
Power drift (%)	-2.560000
Ambient Temperature:	22.8°C
Liquid Temperature:	22.7°C
ConvF:	40.136,34.843,38.721
Crest factor:	1:1

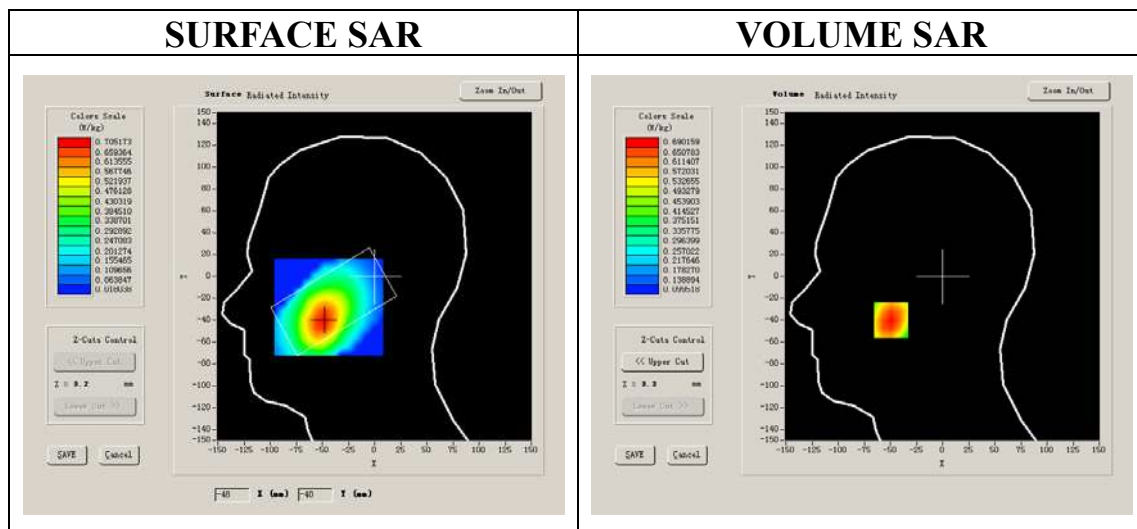


Maximum location: X=-49.00, Y=-40.00

SAR 10g (W/Kg)	0.500498
SAR 1g (W/Kg)	0.668692


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.6902	0.5579	0.4460	0.3615	0.2748	0.2188


SAR, Z Axis Scan (X = -49, Y = -40)

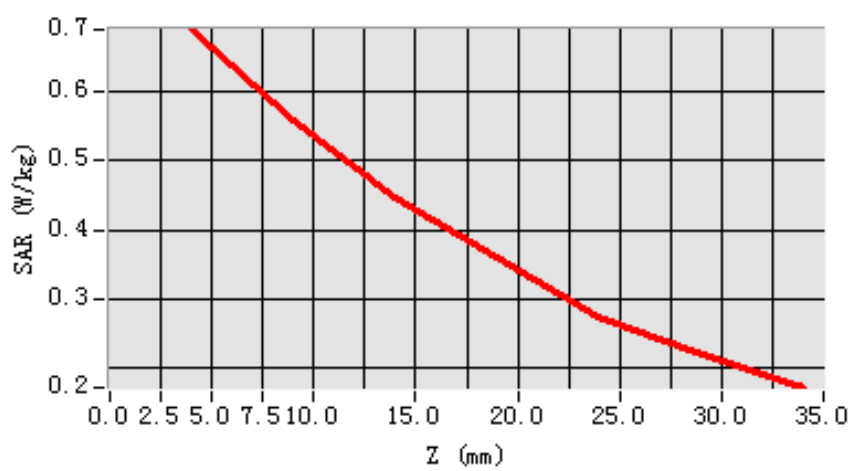

3D scen shot

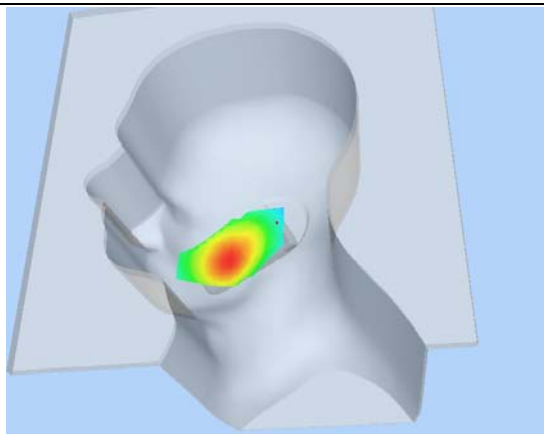

Hot spot position

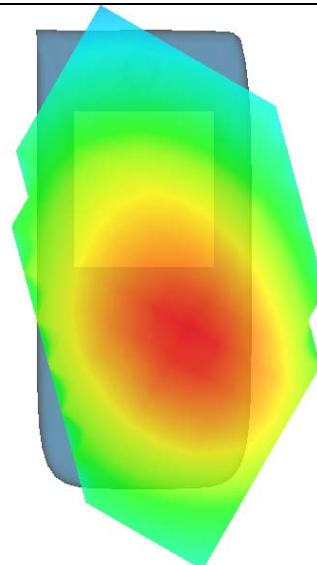

MEASUREMENT 4

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.10.10

Measurement duration: 8 minutes 22 seconds


A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	WCDMA2100
Channels	Middle
Signal	CDMA

B. SAR Measurement Results

Middle Band SAR (Channel 9750):

Frequency (MHz)	1950.000000
Relative permittivity (real part)	39.513290
Conductivity (S/m)	1.386672
Power drift (%)	-0.730000
Ambient Temperature:	22.8°C
Liquid Temperature:	22.7°C
ConvF:	40.136,34.843,38.721
Crest factor:	1:1

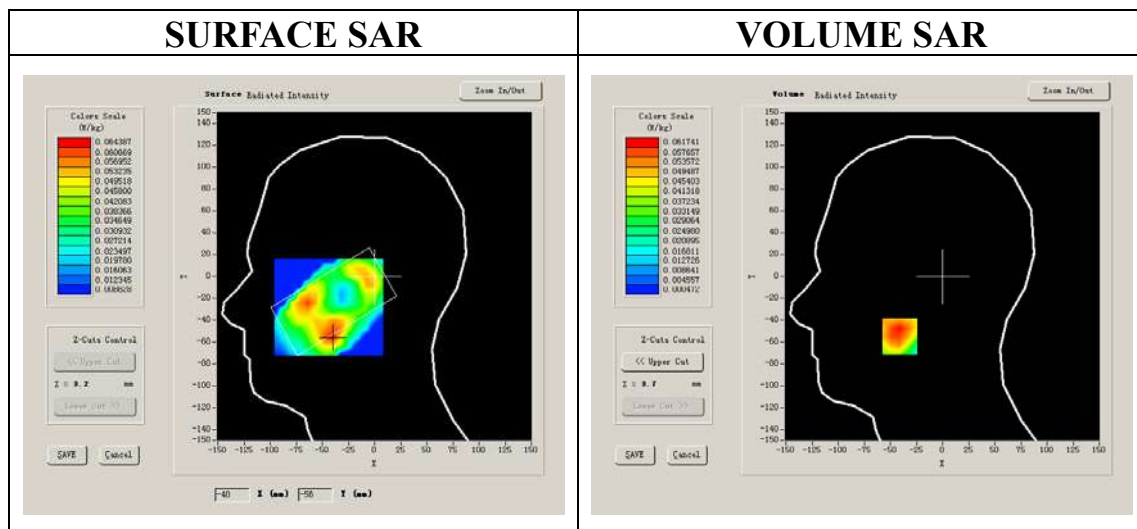


Maximum location: X=-41.00, Y=-55.00

SAR 10g (W/Kg)	0.034632
SAR 1g (W/Kg)	0.059057


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.0581	0.0397	0.0216	0.0168	0.0087	0.0076


SAR, Z Axis Scan (X = -41, Y = -55)

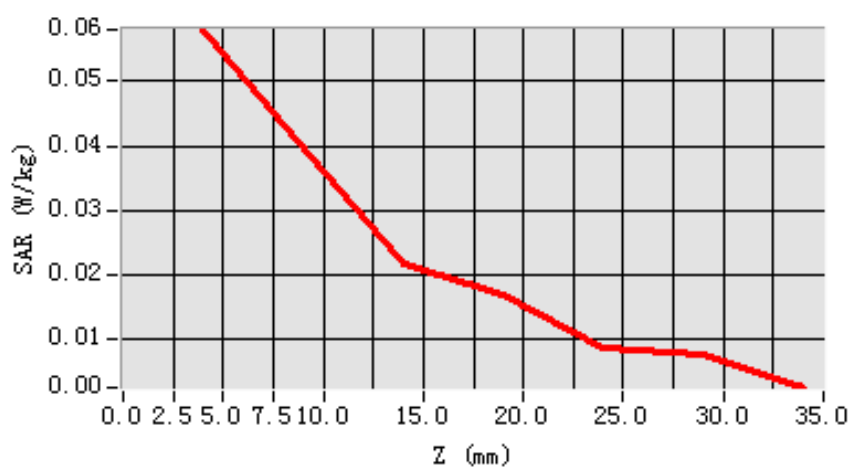

3D scen shot

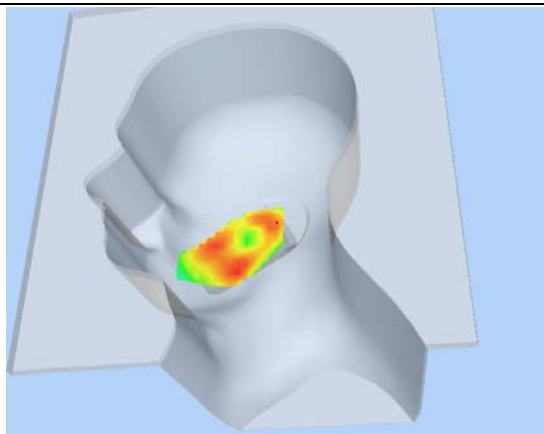

Hot spot position

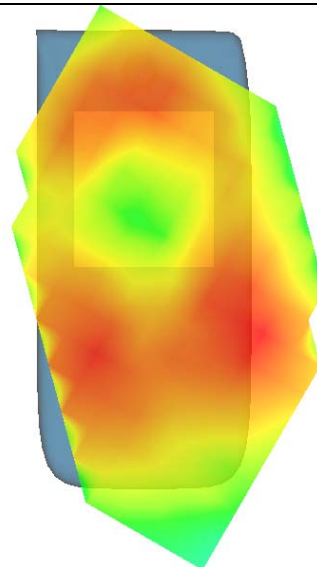

System Performance Check Data(1800MHz)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.10.10

Measurement duration: 13 minutes 27 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat
Device Position	
Band	1800MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

Frequency (MHz)	1800.000000
Relative permittivity (real part)	38.930000
Relative permittivity	15.070000
Conductivity (S/m)	1.436111
Power drift (%)	-0.140000
Ambient Temperature:	22.3°C
Liquid Temperature:	22.6°C
ConvF:	42.533, 36.791, 41.019
Crest factor:	1:1

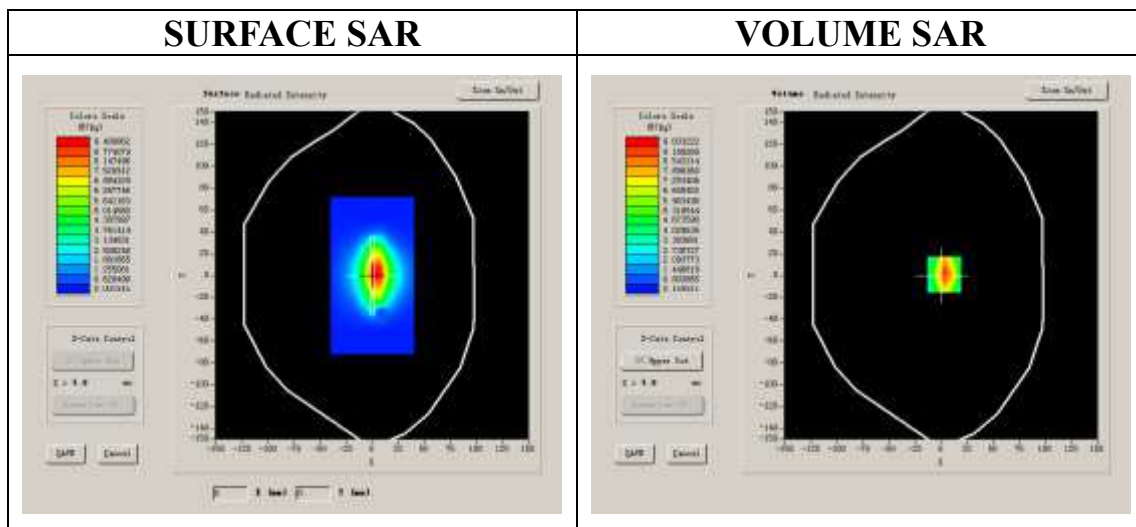


Maximum location: X=3.00, Y=1.00

SAR 10g (W/Kg)	4.981611
SAR 1g (W/Kg)	9.340177


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	10.0621	5.6445	3.6226	2.1642	1.4521	0.9078

SAR, Z Axis Scan (X = 3, Y = 1)

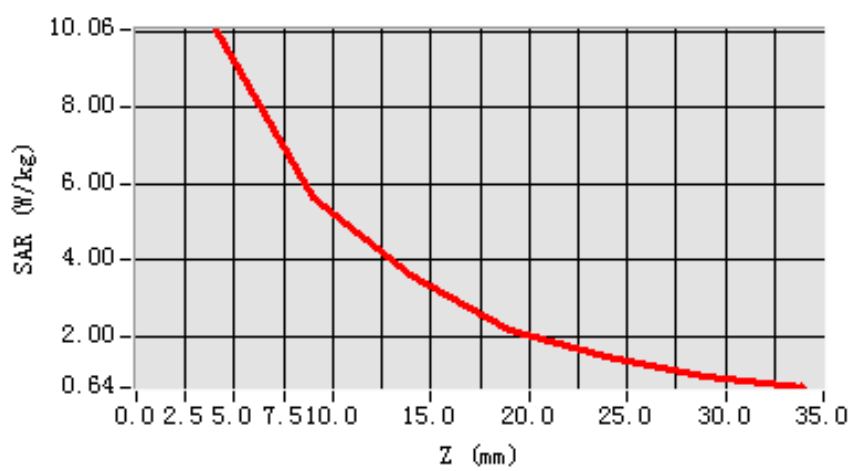

3D scen shot

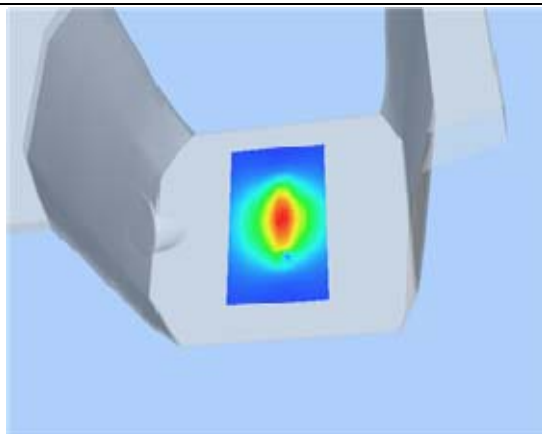

Hot spot position

